

CT 40

Great Productivity



Huge solution tank capacity in minimum external space



Extensive running time (Large battery compartment)



Solution control with automatic stop



Available also with electric power traction (BT version)



Brush control with automatic "delayed" stop



Scrubber driers CT 40



High Performance



Solution distribution from brush center



CWS (Constant Weight System)



Exclusive squeegee system assures high performance at low cost



High quality and performance vacuum motor

Ergonomics, User Friendly



Great manoeuvrability thanks to an optimum weight distribution



Great visibility whilst working



Designed to assure minimum noise levels



Easy to use control panel



Battery level indicator



Recovery tank discharge point and hose at maximum height



Solution tank can be tilted



External battery charger plug



On board charger can be fitted also at a later stage

Low Maintenance Costs



Inlet and outlet filters for maximum solution tank protection



AFS (Anti Foam System)



Brush replacement without tools



Squeegee blade can be used on 4 sides before replacement



Squeegee assembly and blades replacement without tools



Easy access to internal compartments





Robust Construction



Tanks and surrounding body in high density polyurethane



Oil bath reduction gear box



Brush head designed to absorb harsh impact



Squeegee system designed to absorb harsh impact



Panel control switches protected against water and humidity



Technical data		CT40 C/B 45 (*)	CT40 C 50	CT40 C 55	CT40 B 50	CT40 B 55	CT40 BT 50	CT40 BT 55
Scrubbing width	mm	450	500	540	500	540	500	540
Suction width	mm	815	815	815	815	815	815	815
Productivity (at max speed)	m ² /h	1575	1750	1890	1750	1890	2250	2430
Number of brushes		1 (disk)	1 (disk)	1 (disk)	1 (disk)	1 (disk)	1 (disk)	1 (disk)
Solution tank capacity	l	40	40	40	40	40	40	40
Recovery tank capacity	l	50	50	50	50	50	50	50
Power supply		220-240V 50 Hz vers. C 24V (2x12V) vers. B	220-240V 50 Hz	220-240V 50 Hz	24V (2x12V)	24V (2x12V)	24V (2x12V)	24V (2x12V)
Max speed (traction type)	Km/h	3,5 (mechanical)	3,5 (mechanical)	3,5 (mechanical)	3,5 (mechanical)	3,5 (mechanical)	4,5 (electric)	4,5 (electric)
Weight (net)	Kg	83 vers. C 67 vers. B	83	83	67	67	73	73
Dimensions (LxWxH)	mm	1230 x 516 x 960	1230 x 516 x 960	1230 x 516 x 960	1230 x 516 x 960	1230 x 516 x 960	1230 x 516 x 960	1230 x 516 x 960

(*) The C/B versions are not equipped with solenoid valve.




Exclusive squeegee system assures high performance at low cost

Incomparable drying results even on the most difficult surfaces thanks to a very unique design.



Huge tank capacity in minimum external space

40-50 litre capacity tanks make this model very unique in its category.

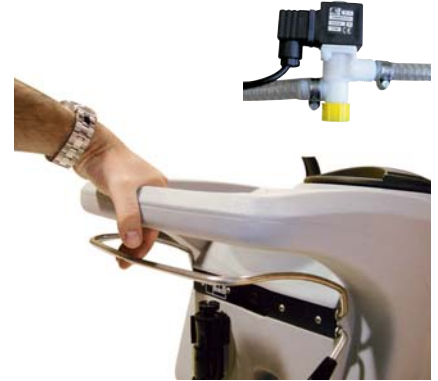

Solution control with automatic stop

Saves water and save chemicals. Solution flow stops and starts upon brush command.



Water level control on both tanks. Maximum protection for the vacuum motor (water level sensor)

1. The vacuum motor is mounted in the highest part of the machine. A sensor shuts off the vacuum motor when the dirty water tank is full.
2. When the dirty water tank is full, the left LED comes on and the vacuum motor shuts down. The right LED indicates when the detergent solution has reached the reserve and there is enough detergent left for about two minutes.



Brush control with automatic delayed stop

Saves brush wear and protects delicate surfaces. Brush rotation stops (3 sec delay) and starts upon brush command.



Recovery tank can be tilted

Easy to rinse and clean thanks also to smooth internal finishes.


IPC